

PanBlast™ SideWinder Angle Blast Nozzles

"Surface Preparation Is Our Business"

The PanBlast™ SideWinder Angle Nozzles are designed for blasting areas that would normally be inaccessible with conventional blast nozzles.

The outlet(s) of the PanBlast™ SideWinder nozzles are located on the side of the nozzle, rather than the end, at an angle of 45°. This permits blasting in areas such as pipe internals, behind ledges and the flanges of beams and inside cavities.

The SideWinder Angle Blast Nozzles are available in various sizes and configurations, including 1 or 3 outlets and with nozzle diameters #4 (1/4" or 6 mm), #5 (5/16" or 8 mm) and #6 (3/8" or 10 mm). This allows the operator to select a SideWinder nozzle to suit almost any application and compressed air supply.

The SideWinder nozzle insert is constructed from long wearing tungsten carbide, mounted inside a tough aluminium outer jacket.


All PanBlast™ SideWinder Angle Blast Nozzles are available in both 50mm (2") contractor style thread and 1 1/4" NPSM threads.



Blast Pots & Cabinets - Remote Control Valves - Abrasive Control Valves - Blast Nozzles - Nozzle Holders & Couplings - Helmets & Breathing Air Fliters - Blast Suits

PanBlast™ SideWinder 50mm (2") Coarse Thread Angle Blast Nozzles -

| Stock Code | Description | Orifice Size | | Thread Size | | Entry Size | | No. of Outlets | Blast Angle |
|----------------|------------------|--------------|-------|-------------|----|------------|----|-------------------|-------------|
| BAC-NZ-PB-0291 | SideWinder 4 x 1 | 6mm | 1/4" | - 50mm | 2" | 25mm | 1" | 1 | 45* |
| BAC-NZ-PB-0292 | SideWinder 4 x 3 | 6mm | 1/4" | | | | | 3 | |
| BAC-NZ-PB-0293 | SideWinder 5 x 1 | 8mm | 5/16" | | | | | 1 | |
| BAC-NZ-PB-0294 | SideWinder 5 x 3 | 8mm | 5/16" | | | | | 3 | |
| BAC-NZ-PB-0295 | SideWinder 6 x 1 | 10mm | 3/8" | | | | | 1 | |
| BAC-NZ-PB-0296 | SideWinder 6 x 3 | 10mm | 3/8" | | | | | 3 | |

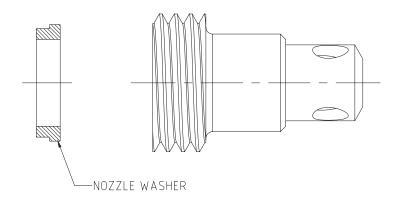

PanBlast™ SideWinder 1 1/4" NPSM Thread Angle Blast Nozzles -

| Stock Code | Description | Orifice Size | | Thread Size | | Entry Size | | No. of Outlets | Blast Angle |
|----------------|------------------|--------------|-------|-------------|--------|------------|----|-------------------|----------------|
| BAC-NZ-PB-0299 | SideWinder 4 x 1 | 6mm | 1/4" | - 32mm | 1 1/4" | 25mm | 1" | 1 | 45* |
| BAC-NZ-PB-0300 | SideWinder 4 x 3 | 6mm | 1/4" | | | | | 3 | |
| BAC-NZ-PB-0301 | SideWinder 5 x 1 | 8mm | 5/16" | | | | | 1 | |
| BAC-NZ-PB-0302 | SideWinder 5 x 3 | 8mm | 5/16" | | | | | 3 | |
| BAC-NZ-PB-0303 | SideWinder 6 x 1 | 10mm | 3/8" | | | | | 1 | |
| BAC-NZ-PB-0304 | SideWinder 6 x 3 | 10mm | 3/8" | | | | | 3 | |

Note: All blast nozzles are supplied with one (1) nozzle washer to suit NNH nylon nozzle holder.

